



پارسیان لیفتراک لوتوس ماشین  
عاملیت فروش و خدمات پس از فروش آسان خودرو - کد ۱۰۵

**آسان خودرو**  
نماینده انحصاری ماشین آلات زوم لایون




تهران - ابتدای بزرگراه چمران






TC7035B-16

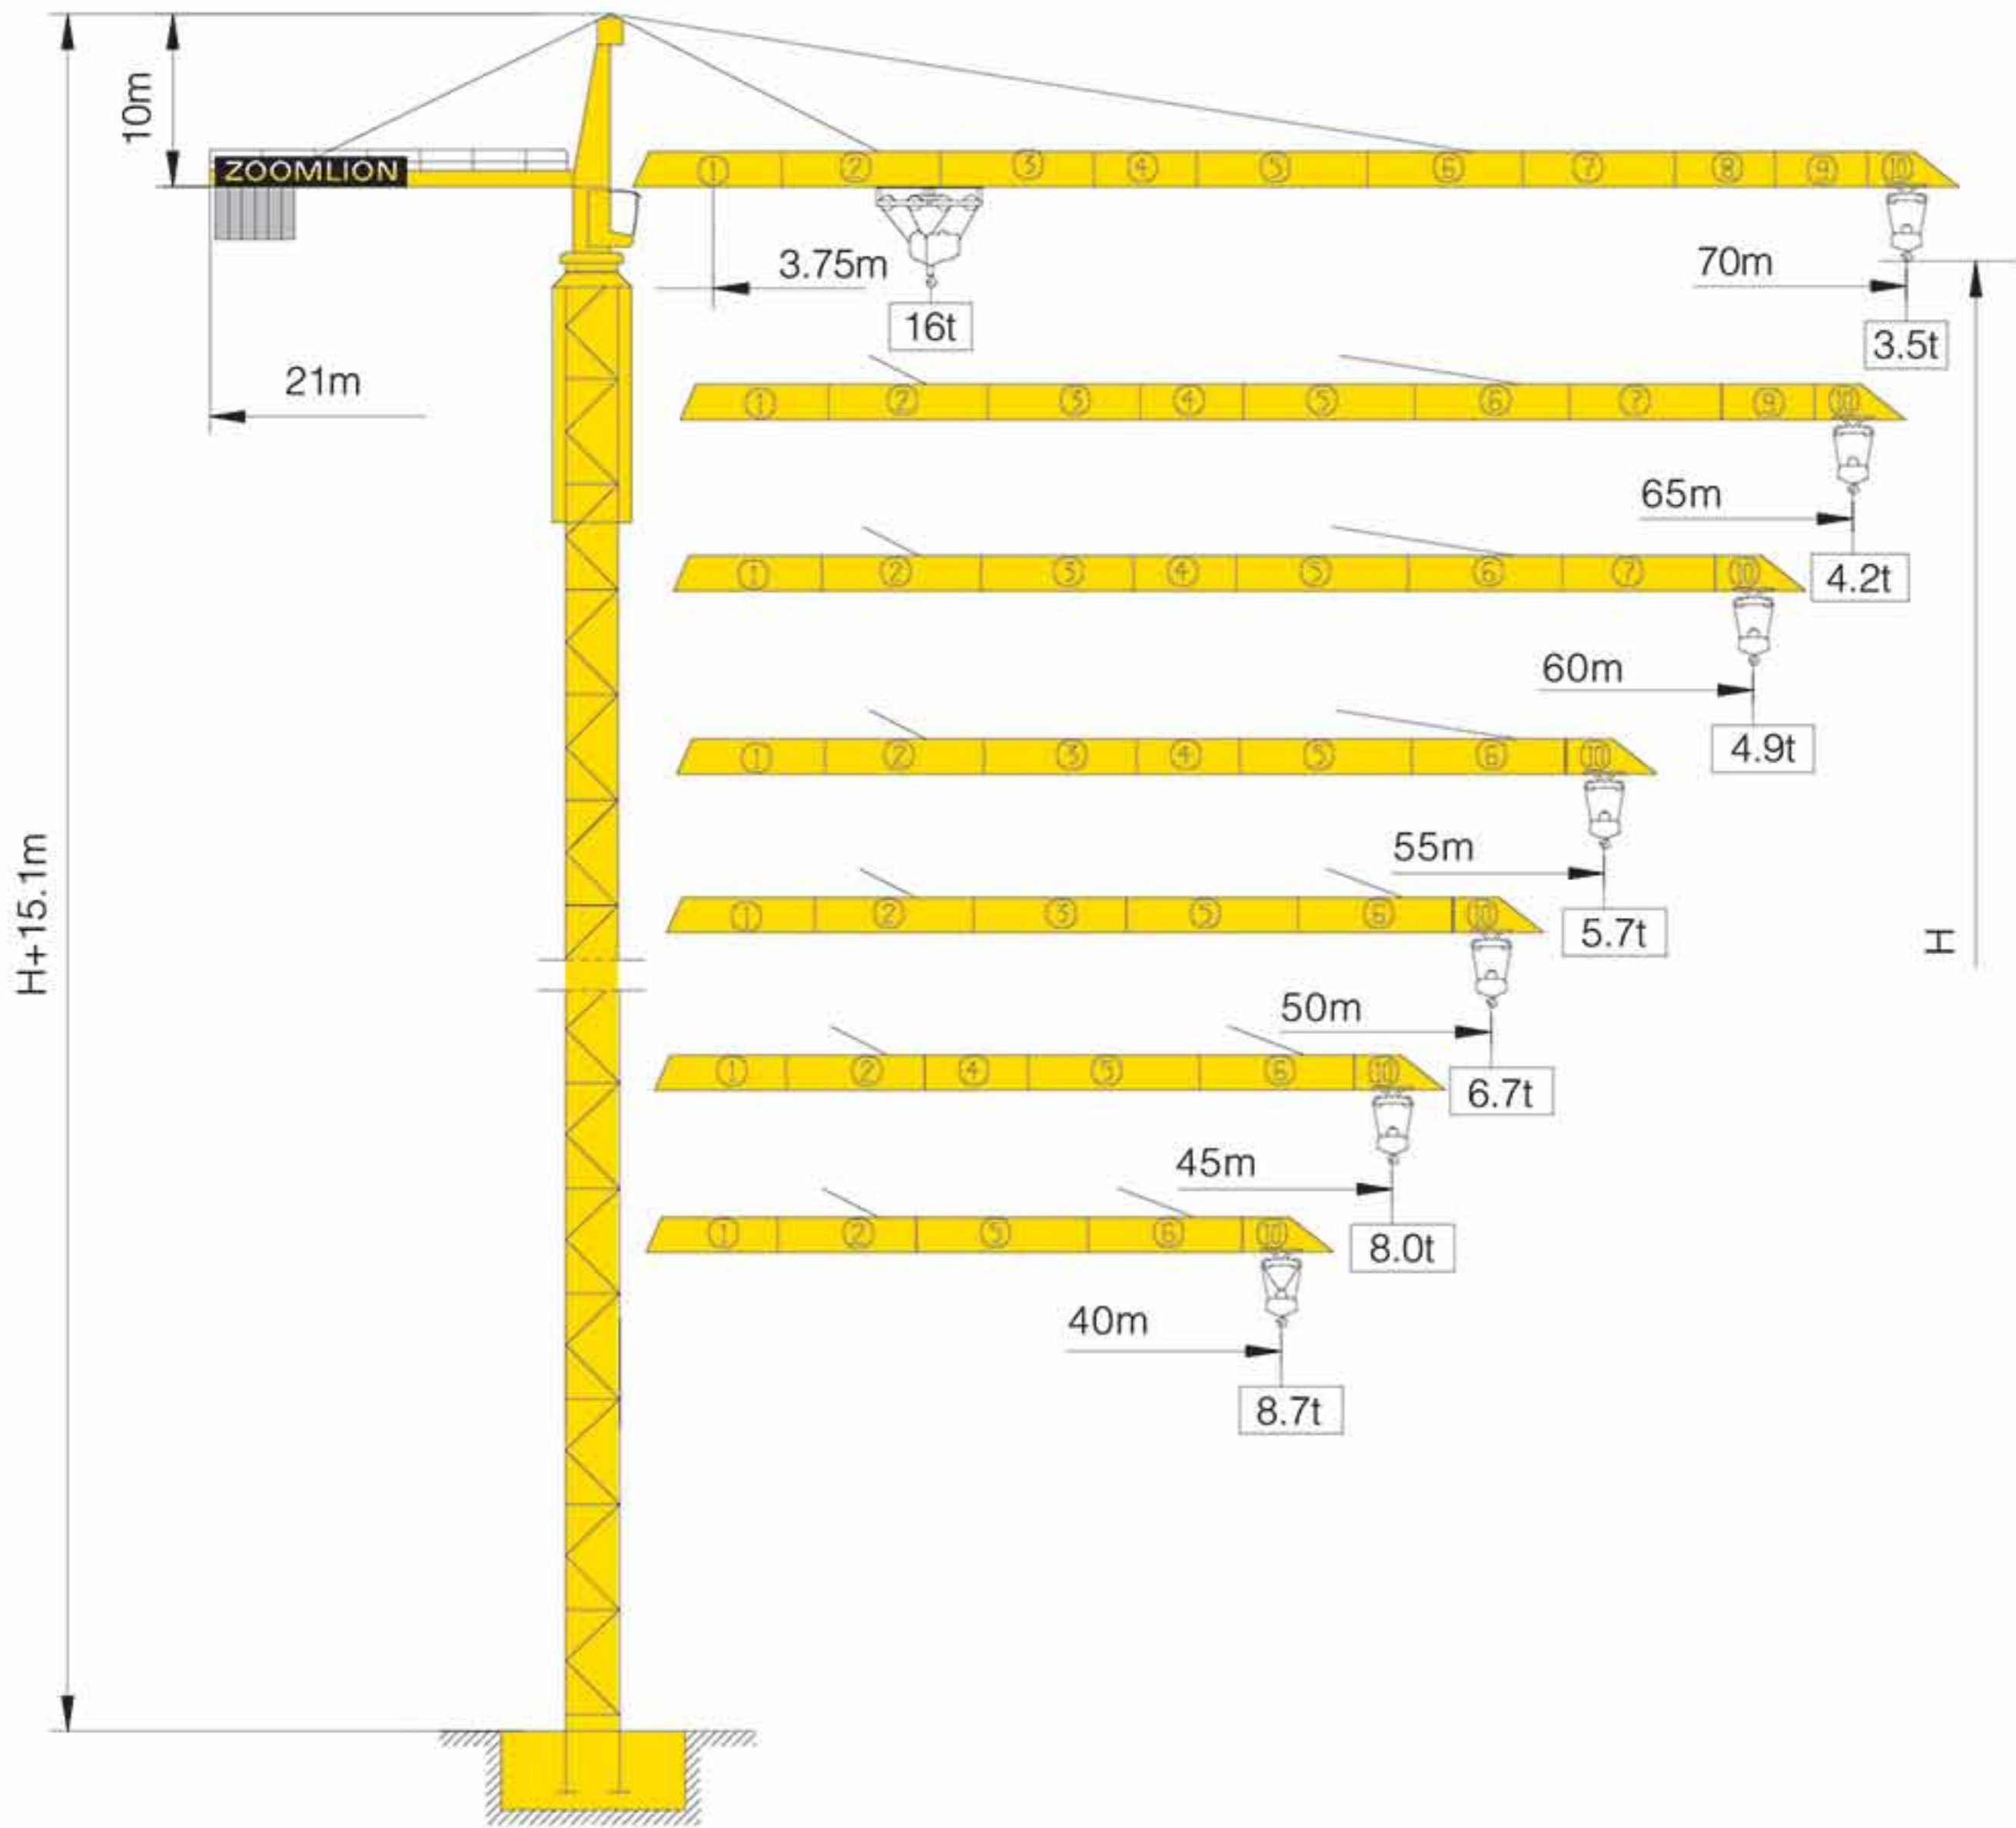




وزنه های تعادل


|  |  |  (Kg) | PHZ4000 | PHZ3000 | PHZ2000 |
|---|---|---|---------|---------|---------|
| 70m   | 21m   | 22000   | 3       | 2       | 2       |
| 65m   | 21m   | 20000   | 3       | 2       | 1       |
| 60m   | 21m   | 19000   | 3       | 1       | 2       |
| 55m   | 21m   | 18000   | 3       | 2       | 0       |
| 50m   | 21m   | 16000   | 3       | 0       | 2       |
| 45m   | 21m   | 14000   | 3       | 0       | 1       |
| 40m   | 21m   | 12000   | 3       | 0       | 0       |



ساختار ارتفاعی

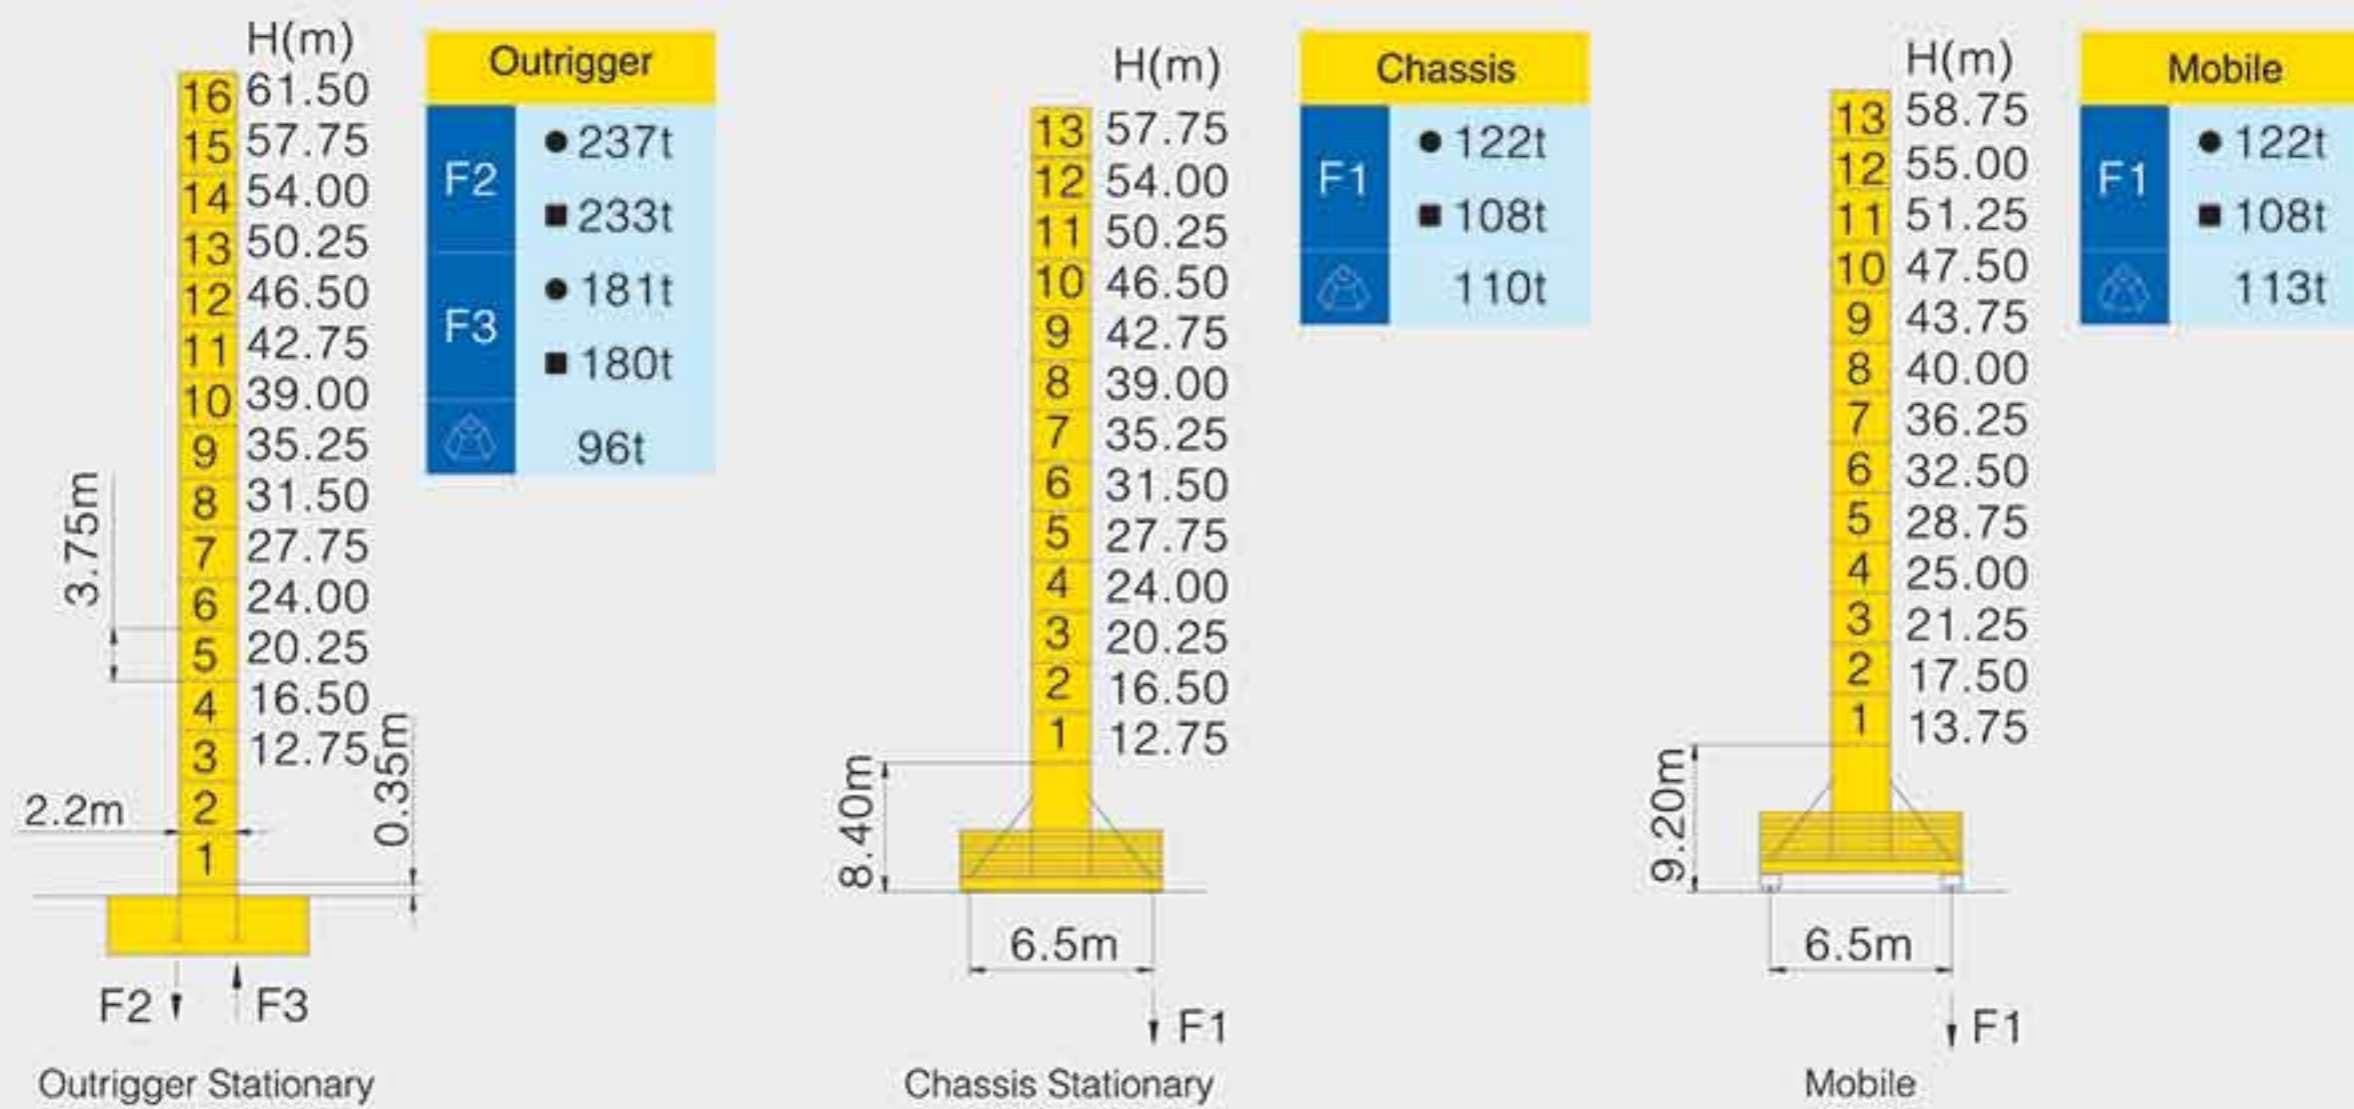

کمربندها

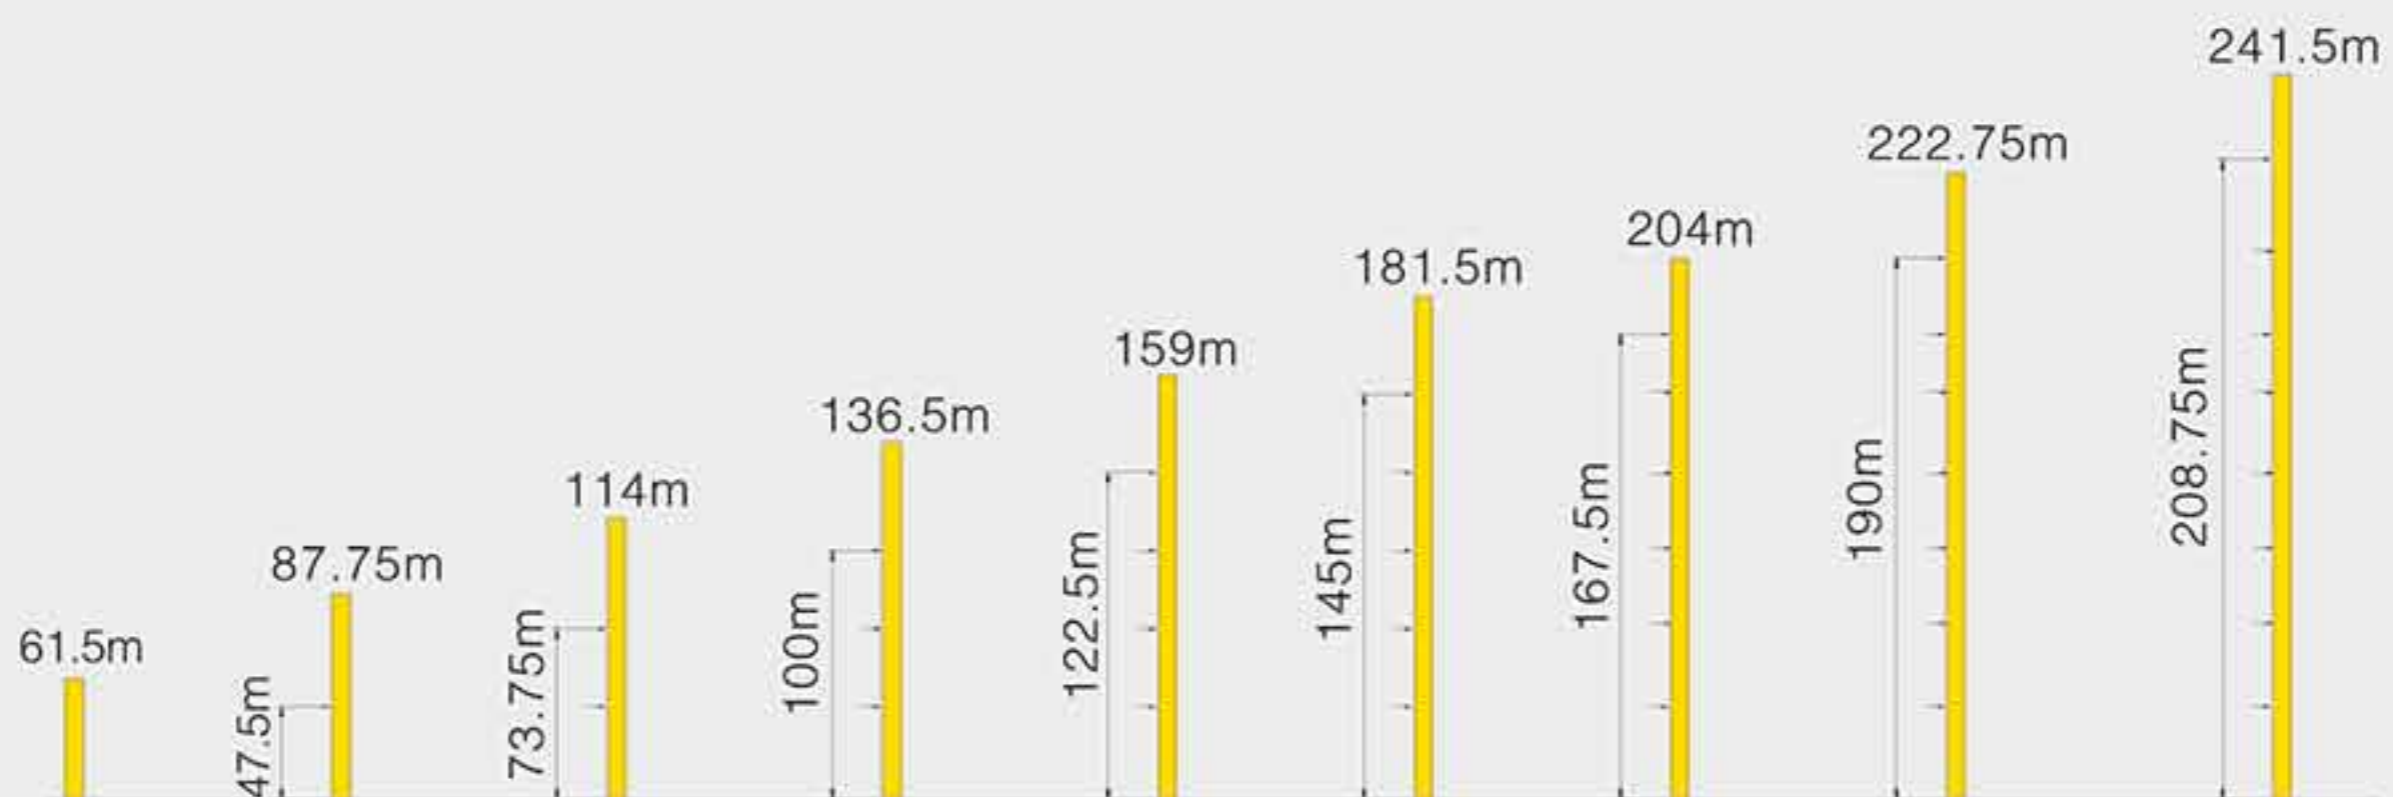



منحنی بار

|              |  | Max.Capacity m/t | 18.0  | 23.0  | 25.0  | 30.0  | 35.0 | 40.0 | 43.0 | 45.0 | 48.0 | 50.0 | 53.0 | 55.0 | 58.0 | 60.0 | 63.0 | 65.0 | 68.0 | 70.0 |
|--------------|--|------------------|-------|-------|-------|-------|------|------|------|------|------|------|------|------|------|------|------|------|------|------|
| 70m (R=71.1) |  | 3.75—35.4m 8t    | 8.00  |       |       |       |      | 7.60 | 6.37 | 6.04 | 5.59 | 5.32 | 4.96 | 4.74 | 4.44 | 4.26 | 4.00 | 3.85 | 3.63 | 3.50 |
|              |  | 3.75—18.4m 16t   | 16.00 | 12.30 | 11.10 | 8.89  | 7.33 | 6.16 | 5.60 | 5.26 | 4.82 | 4.55 | 4.18 | 3.95 | 3.66 | 3.48 | 3.23 | 3.07 | 2.86 | 2.72 |
| 65m (R=66.1) |  | 3.75—37.9m 8t    | 8.00  |       |       |       |      | 7.52 | 6.91 | 6.55 | 6.07 | 5.78 | 5.39 | 5.16 | 4.84 | 4.64 | 4.37 | 4.20 |      |      |
|              |  | 3.75—19.7m 16t   | 16.00 | 13.30 | 12.00 | 9.67  | 7.99 | 6.74 | 6.13 | 5.77 | 5.29 | 5.01 | 4.62 | 4.38 | 4.06 | 3.86 | 3.59 | 3.42 |      |      |
| 60m (R=61.1) |  | 3.75—39.6m 8t    | 8.00  |       |       |       |      | 7.91 | 7.28 | 6.90 | 6.40 | 6.10 | 5.69 | 5.44 | 5.11 | 4.90 |      |      |      |      |
|              |  | 3.75—20.5m 16t   | 16.00 | 14.00 | 12.70 | 10.20 | 8.44 | 7.14 | 6.50 | 6.13 | 5.62 | 5.32 | 4.91 | 4.67 | 4.33 | 4.12 |      |      |      |      |
| 55m (R=56.1) |  | 3.75—41.2m 8t    | 8.00  |       |       |       |      | 7.61 | 7.22 | 6.69 | 6.38 | 5.96 | 5.70 |      |      |      |      |      |      |      |
|              |  | 3.75—21.3m 16t   | 16.00 | 14.60 | 13.30 | 10.70 | 8.85 | 7.49 | 6.83 | 6.44 | 5.92 | 5.60 | 5.18 | 4.92 |      |      |      |      |      |      |
| 50m (R=51.1) |  | 3.75—42.9m 8t    | 8.00  |       |       |       |      | 7.98 | 7.57 | 7.03 | 6.70 |      |      |      |      |      |      |      |      |      |
|              |  | 3.75—22.2m 16t   | 16.00 | 15.40 | 13.90 | 11.20 | 9.31 | 7.89 | 7.20 | 6.80 | 6.25 | 5.92 |      |      |      |      |      |      |      |      |
| 45m (R=46.1) |  | 3.75—45.0m 8t    | 8.00  |       |       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|              |  | 3.75—23.7m 16t   | 16.00 | 15.10 | 12.20 | 10.10 | 8.60 | 7.86 | 7.42 |      |      |      |      |      |      |      |      |      |      |      |
| 40m (R=41.1) |  | 3.75—40.0m 8t    | 8.00  |       |       |       |      |      |      |      |      |      |      |      |      |      |      |      |      |      |
|              |  | 3.75—24.0m 16t   | 16.00 | 15.30 | 12.30 | 10.30 | 8.72 |      |      |      |      |      |      |      |      |      |      |      |      |      |

انواع مکانیزمهای حرکتی

|  |             | Hoisting QE1675E               |                 |
|--|-------------|--------------------------------|-----------------|
|  | Slewing     | HVV145B1.130A<br>HVV145B2.130A |                 |
|  | 0-0.6 r/min | 2x145 Nm                       |                 |
|  | Trolley     | BP110A                         |                 |
|  | 0-100 m/min | 11 kW                          |                 |
|  | Travelling  | ZAH52A-D<br>ZCH52A-D           |                 |
|  | 0-25 m/min  | 4x5.2 kW                       |                 |
|  |             | 60 kW                          |                 |
|  |             | 600m (6 layers)                |                 |
|  |             | Consult us if overtop          |                 |
|  |             | IV                             |                 |
|  |             |                                | 8t 37.5 m/min   |
|  |             |                                | 16t 18.75 m/min |
|  |             | V                              |                 |
|  |             |                                | 4t 75 m/min     |
|  |             |                                | 8t 37.5 m/min   |
|  |             | 380V(+10% -10%) 50Hz           |                 |
|  |             | 86+4x5.2 kW                    |                 |